




P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Absylux® CN-P

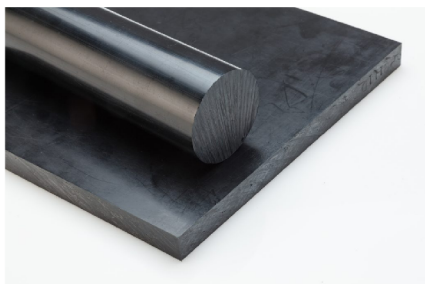


Absylux® ABS CN-P is a carbon powder-filled Acrylonitrile Butadiene Styrene offering surface resistivity in the 10EE4 to 10EE6 ohm/sq range and excellent dimensional stability. This material is a good choice when ESD protection is needed for highly sensitive electronic circuitry or to minimize static discharge in flammable environments.

INDUSTRY



Engineering



Semiconductor and ESD

COLORS AVAILABLE



Black

ATTRIBUTES

 Dielectric Properties	✓
 Dimensional Stability	✓
 Impact Resistance	✓

SHAPES

Compression Sheet	✓
Extruded Sheet	✓
Extruded Film	✓
Extruded Rod	✓



P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Absylux® CN-P

TYPICAL PROPERTIES

PROPERTY	TEST STANDARD	ENGLISH UNITS	METRIC UNITS
Mechanical			
Tensile Strength @ Yield	D638	4.5 kpsi	31 Mpa
Tensile Strength @ Break	D638	4.2 kpsi	29 Mpa
Tensile Elongation @ Yield	D638	2%	2%
Tensile Elongation @ Break	D638	6.4%	6.4%
Tensile Modulus	D638	346 kpsi	2386 Mpa
Flexural Strength	D790	8.6 kpsi	59.3 Mpa
Flexural Modulus	D790	359 kpsi	2475 Mpa
Izod Impact Resistance - Notched	D256	0.4 ft-lb/in	0.0018 kJ/m
Izod Impact Resistance - Unnotched	D4812	6.9 ft-lb/in	30.7 kJ/m
Thermal			
HDT @ 64 psi	D648	201°F	94°C
HDT @ 264 psi	D648	176°F	80°C
Physical			
Moisture Absorption	D570	0.22%	0.22%
Specific Gravity	D792	1.1	1.1
Electrical			
Surface Resistivity	D257	10 ³ - 10 ⁶ ohm/sq	10 ³ - 10 ⁶ ohm/sq

*Data above is based on testing of injection molded test specimens



P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Absylux® CN-P

PRODUCT SHAPES & DIMENSIONS

Rods: 48"L (122cm)

2.5" (63.5mm)	2.75" (69.85mm)	3.0" (76.2mm)
---------------	-----------------	---------------

Rods: 96"L (244cm)

0.5" (12.7mm)	0.625" (15.88mm)	0.75" (19.05mm)	1" (25.4mm)	1.25" (31.75mm)	1.375" (34.93mm)
1.5" (38.1mm)	1.625" (41.28mm)	1.75" (44.45mm)	1.875" (47.63mm)	2" (50.8mm)	

Compression Sheets: 24"W x 48"L (61cm x 122cm)

0.25" (6.35mm)	0.375" (9.53mm)	0.5" (12.7mm)	0.75" (19.05mm)	1.0" (25.4mm)	1.25" (31.75mm)
1.5" (38.1mm)	1.75" (44.45mm)	2.0" (50.8mm)	2.25" (57.15mm)	2.5" (63.5mm)	2.75" (69.85mm)
3.0" (76.2mm)	3.25" (82.55mm)	3.5" (88.9mm)	3.75" (95.25mm)	4.0" (101.6mm)	4.25" (107.95mm)
4.5" (114.3mm)	4.75" (120.65mm)	5.0" (127mm)	5.25" (133.35mm)	5.5" (139.7mm)	5.75" (146.05mm)
6.0" (152.4mm)					

Compression Sheets: 48"W x 96"L (122cm x 244cm)

0.25" (6.35mm)	0.5" (12.7mm)	0.75" (19.05mm)	1" (25.4mm)	1.25" (31.75mm)	1.5" (38.1mm)
1.75" (44.45mm)	2" (50.8mm)	2.25" (57.15mm)	2.50" (63.5mm)	2.75" (69.85mm)	3" (76.2mm)
3.25" (82.55mm)	3.50" (88.9mm)	3.75" (95.25mm)	4" (101.6mm)	4.25" (107.95mm)	4.50" (114.3mm)
4.75" (120.65mm)	5" (127mm)	5.25" (133.35mm)	5.50" (139.7mm)	5.75" (146.05mm)	6" (152.4mm)



P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Absylux® CN-P

Compression Sheets: 48"W x 120"L (122cm x 305cm)

0.25" (6.35mm)	0.375" (9.53mm)	0.5" (12.7mm)	0.75" (19.05mm)	1" (25.4mm)	1.25" (31.75mm)
1.50" (38.1mm)	1.75" (44.45mm)	2" (50.8mm)	2.25" (57.15mm)	2.50" (63.5mm)	2.75" (69.85mm)
3" (76.2mm)	3.25" (82.55mm)	3.50" (88.9mm)	3.75" (95.25mm)	4" (101.6mm)	4.25" (107.95mm)
4.50" (114.3mm)	4.75" (120.65mm)	5" (127mm)	5.25" (133.35mm)	5.50" (139.7mm)	5.75" (146.05mm)
6" (152.4mm)					

Compression Sheets: 60"W x 120"L (152cm x 305cm)

0.25" (6.35mm)	0.375" (9.53mm)	0.5" (12.7mm)	0.75" (19.05mm)	1" (25.4mm)	1.25" (31.75mm)
1.50" (38.1mm)	1.75" (44.45mm)	2" (50.8mm)	2.25" (57.15mm)	2.50" (63.5mm)	2.75" (69.85mm)
3" (76.2mm)	3.25" (82.55mm)	3.50" (88.9mm)	3.75" (95.25mm)	4" (101.6mm)	4.25" (107.95mm)
4.50" (114.3mm)	4.75" (120.65mm)	5" (127mm)	5.25" (133.35mm)	5.50" (139.7mm)	5.75" (146.05mm)
6" (152.4mm)					

Extruded Sheets: 48"W x 96"L (122cm x 244cm)

0.03" (0.76mm)	0.035" (0.89mm)	0.06" (1.52mm)	0.062" (1.57mm)	0.08" (2.03mm)	0.09" (2.29mm)
0.095" (2.41mm)	0.125" (3.18mm)	0.1875" (4.76mm)	0.25" (6.35mm)		

Extruded Films: 26"W (66cm)

0.01" (0.25mm)	0.02" (0.51mm)
----------------	----------------

LAST REVISED: 01/30/2025

This information is offered solely for your consideration, examination and verification, and is to be construed neither as a warranty nor guarantee that the same results as those stated herein will be obtained by the use to which others may put the material. Each user of the material should make his own tests to determine the characteristics and suitability of the material for his own particular use and the use which will be made of the completed product. This publication is not to be taken as a license to operate under, or a recommendation to infringe any patents. The observance of all legal regulations and patents is the responsibility of the user. The buyer's exclusive remedy against the seller shall be for the repair or replacement of defective stock. No other remedy (including, but not limited to, incidental or consequential damages for lost profits, lost sales, injury to person or property, or other incidental or consequential loss) shall be available to the buyer.

EXCLUSION OF WARRANTIES: THERE ARE NO WARRANTIES AS TO THE MATERIAL DESCRIBED HEREIN, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE. ANY VALUES STATED IN SELLER'S LITERATURE ARE TYPICAL PROPERTIES ONLY.