




P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Propylux™ CN-P

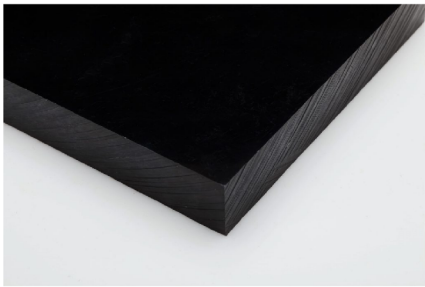


Propylux™ PP CN-P (Statically conductive polypropylene) is a carbon powder-filled polypropylene offering surface resistivity in the 10e4 to 10e6 ohm/sq range and broad chemical resistance. This material is a good choice when ESD protection is needed or to minimize static discharge in flammable environments.

INDUSTRY



Engineering




Semiconductor and ESD

COLORS AVAILABLE



Black

ATTRIBUTES

 Low Moisture Absorption	✓
 Chemical Resistance	✓
 Statically Conductive	✓

SHAPES

Compression Sheet	✓
-------------------	---



P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Propylux™ CN-P

TYPICAL PROPERTIES

PROPERTY	TEST STANDARD	ENGLISH UNITS	METRIC UNITS
Mechanical			
Tensile Strength - Yield	ASTM D638	3,050 psi	21 Mpa
Tensile Strength - Break	ASTM D638	2,320 psi	16 Mpa
Tensile Elongation - Yield	ASTM D638	8.4 %	8.4 %
Tensile Elongation - Break	ASTM D638	48 %	48 %
Tensile Modulus	ASTM D638	181,000 psi	1,250 Mpa
Flexural Strength	ASTM D790	4,210 psi	29 Mpa
Flexural Modulus	ASTM D790	170,000 psi	1,170 Mpa
Izod Impact Resistance - Notched	ASTM D256	15 ft-lb/in	0.8 kJ/m
Izod Impact Resistance - Unnotched	ASTM D4812	no break ft-lb/in	no break kJ/m
Thermal			
HDT @ 264 psi	ASTM D648	124°F	51°C
Physical			
Specific Gravity	ASTM D792	0.95	0.95
Electrical			
Surface Resistivity	ASTM D257	10 ² - 10 ⁶ ohm/sq	10 ² - 10 ⁶ ohm/sq

*Data above is based on testing of injection molded test specimens



P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Propylux™ CN-P

PRODUCT SHAPES & DIMENSIONS

Compression Sheets: 24"W x 48"L (61cm x 122cm)

0.25" (6.35mm)	0.375" (9.53mm)	0.5" (12.7mm)	0.75" (19.05mm)	1" (25.4mm)	1.25" (31.75mm)
1.50" (38.1mm)	1.75" (44.45mm)	2" (50.8mm)	2.25" (57.15mm)	2.50" (63.5mm)	2.75" (69.85mm)
3" (76.2mm)	3.25" (82.55mm)	3.50" (88.9mm)	3.75" (95.25mm)	4" (101.6mm)	

Compression Sheets: 48"W x 96"L (122cm x 244cm)

0.25" (6.35mm)	0.375" (9.53mm)	0.5" (12.7mm)	0.75" (19.05mm)	1" (25.4mm)	1.25" (31.75mm)
1.50" (38.1mm)	1.75" (44.45mm)	2" (50.8mm)	2.25" (57.15mm)	2.50" (63.5mm)	2.75" (69.85mm)
3" (76.2mm)	3.25" (82.55mm)	3.50" (88.9mm)	3.75" (95.25mm)	4" (101.6mm)	

Compression Sheets: 48"W x 120"L (122cm x 305cm)

0.25" (6.35mm)	0.375" (9.53mm)	0.5" (12.7mm)	0.75" (19.05mm)	1" (25.4mm)	1.25" (31.75mm)
1.50" (38.1mm)	1.75" (44.45mm)	2" (50.8mm)	2.25" (57.15mm)	2.50" (63.5mm)	2.75" (69.85mm)
3" (76.2mm)	3.25" (82.55mm)	3.50" (88.9mm)	3.75" (95.25mm)	4" (101.6mm)	

Compression Sheets: 60"W x 120"L (152cm x 305cm)

0.25" (6.35mm)	0.375" (9.53mm)	0.5" (12.7mm)	0.75" (19.05mm)	1" (25.4mm)	1.25" (31.75mm)
1.50" (38.1mm)	1.75" (44.45mm)	2" (50.8mm)	2.25" (57.15mm)	2.50" (63.5mm)	2.75" (69.85mm)
3" (76.2mm)	3.25" (82.55mm)	3.50" (88.9mm)	3.75" (95.25mm)	4" (101.6mm)	

LAST REVISED: 01/05/2024

This information is offered solely for your consideration, examination and verification, and is to be construed neither as a warranty nor guarantee that the same results as those stated herein will be obtained by the use to which others may put the material. Each user of the material should make his own tests to determine the characteristics and suitability of the material for his own particular use and the use which will be made of the completed product. This publication is not to be taken as a license to operate under, or a recommendation to infringe any patents. The observance of all legal regulations and patents is the responsibility of the user. The buyer's exclusive remedy against the seller shall be for the repair or replacement of defective stock. No other remedy (including, but not limited to, incidental or consequential damages for lost profits, lost sales, injury to person or property, or other incidental or consequential loss) shall be available to the buyer.

EXCLUSION OF WARRANTIES: THERE ARE NO WARRANTIES AS TO THE MATERIAL DESCRIBED HEREIN, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE. ANY VALUES STATED IN SELLER'S LITERATURE ARE TYPICAL PROPERTIES ONLY.