




P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Propylux™ HS2

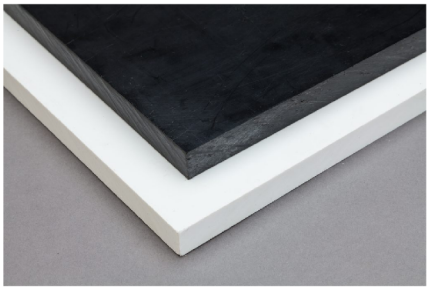

Propylux™ HS2 is heat-stabilized compression molded polypropylene sheet made from FDA, USP VI compliant polypropylene resin. Its broad chemical resistance, low moisture absorption, hydrolysis resistance, and toughness make it ideal for medical and life science applications. Propylux™ HS2 is put through a unique heat stabilization process that stress-relieves the material, improves the dimensional stability, and enables the material to be repeatedly steam sterilized without loss of mechanical properties, aesthetics or dimensional stability. Suitable sterilization methods include steam autoclaving, EtO gas, and cold sterilization. Propylux™ HS2 is fully lot traceable.

INDUSTRY



COLORS AVAILABLE



ATTRIBUTES

Biocompatibility	✓
Dimensional Stability	✓
Steam Sterilizable	✓
Chemical Resistance	✓

SHAPES

Compression Sheet	✓
-------------------	---



P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Propylux™ HS2

TYPICAL PROPERTIES

PROPERTY	TEST STANDARD	ENGLISH UNITS	METRIC UNITS
Mechanical			
Flexural Modulus	D790	259 kpsi	1,786.00 MPa
Flexural Strength - 5%	D790	7.4 kpsi	51.00 MPa
Izod Impact Resistance - Notched	D256	1.60 ft-lb/in	85.00 J/m
Izod Impact Resistance - Unnotched	D256	22.00 ft-lb/in	1,174J/m
Specific Gravity	D792	0.90	0.90
Tensile Elongation @ Break	D638	19.00 %	19.00 %
Tensile Elongation @ Yield	D638	7.00 %	7.00 %
Tensile Strength @ Break	D638	4.4 kpsi	31 MPa
Tensile Strength @ Yield	D638	5.1 kpsi	35 MPa
Thermal			
HDT @ 66 psi	D648	302 °F	150 °C
HDT @ 264 psi	D648	160 °F	71 °C
Melting Point	D3418	320 °F	160 °C
Physical			
Specific Gravity	D792	0.90	0.90

*Data above is based on testing of machined test specimens made from compression molded sheet



P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Propylux™ HS2

PRODUCT SHAPES & DIMENSIONS

Compression Sheets: 48"W x 24"L (122cm x 61cm)

1.75" (44.45mm)	2.0" (50.8mm)	2.25" (57.15mm)	2.5" (63.5mm)	2.75" (69.85mm)	3.0" (76.2mm)
-----------------	---------------	-----------------	---------------	-----------------	---------------

Compression Sheets: 48"W x 40"L (122cm x 102cm)

0.5" (12.7mm)	0.75" (19.05mm)	1.0" (25.4mm)	1.25" (31.75mm)	1.5" (38.1mm)	
---------------	-----------------	---------------	-----------------	---------------	--

Compression Sheets: 48"W x 120"L (122cm x 305cm)

0.5" (12.7mm)	0.75" (19.05mm)	1" (25.4mm)	1.25" (31.75mm)	1.50" (38.1mm)	1.75" (44.45mm)
2" (50.8mm)	2.25" (57.15mm)	2.50" (63.5mm)	2.75" (69.85mm)	3" (76.2mm)	

LAST REVISED: 03/12/2024

This information is offered solely for your consideration, examination and verification, and is to be construed neither as a warranty nor guarantee that the same results as those stated herein will be obtained by the use to which others may put the material. Each user of the material should make his own tests to determine the characteristics and suitability of the material for his own particular use and the use which will be made of the completed product. This publication is not to be taken as a license to operate under, or a recommendation to infringe any patents. The observance of all legal regulations and patents is the responsibility of the user. The buyer's exclusive remedy against the seller shall be for the repair or replacement of defective stock. No other remedy (including, but not limited to, incidental or consequential damages for lost profits, lost sales, injury to person or property, or other incidental or consequential loss) shall be available to the buyer.

EXCLUSION OF WARRANTIES: THERE ARE NO WARRANTIES AS TO THE MATERIAL DESCRIBED HEREIN, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE. ANY VALUES STATED IN SELLER'S LITERATURE ARE TYPICAL PROPERTIES ONLY.