




P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Propylux™ VF

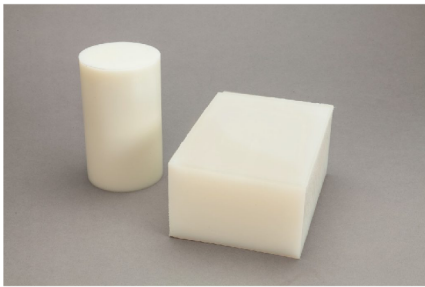

Propylux™ VF is made from resin that is suitable for use in certain food contact applications, contact your local Westlake Plastics representative for specific regulatory declarations. Propylux VF is manufactured as a void-free polypropylene (PP) copolymer. Highly chemically resistant, all Propylux™ VF sheet and rod products are 100% ultrasonically tested and guaranteed to be free of voids or porosity. Propylux™ VF is suitable for a wide range of uses, from chemical storage tanks to machined pump housings and manifolds.


INDUSTRY



Chemical Process



Engineering




Semiconductor and ESD

COLORS AVAILABLE



Natural

ATTRIBUTES

 Chemical Resistance	✓
 Food Contact	✓
 Impact Resistance	✓

SHAPES

Compression Sheet	✓
Extruded Rod	✓



P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Propylux™ VF

TYPICAL PROPERTIES

PROPERTY	TEST STANDARD	ENGLISH UNITS	METRIC UNITS
Mechanical			
Flexural Modulus - 1% Secant	D790	151 kpsi	1040 MPa
Tensile Elongation @ Yield	D638	11 %	11 %
Tensile Strength @ Break	D638	3.2 kpsi	22 MPa
Tensile Strength @ Yield	D638	4 kpsi	28 MPa
Izod Impact Resistance - Notched	D256	1.0 ft-lb/in	0.054 kJ/m
Thermal			
HDT @ 64 psi	D648	172 °F	79 °C
Other			
Specific Gravity	D792	0.90	0.90

*Data above is based on testing of injection molded test specimens



P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Propylux™ VF

PRODUCT SHAPES & DIMENSIONS

Rods: 48"L (122cm)

2.25" (57.15mm)	2.5" (63.5mm)	2.75" (69.85mm)	3.0" (76.2mm)	3.25" (82.55mm)	3.5" (88.9mm)
-----------------	---------------	-----------------	---------------	-----------------	---------------

Rods: 96"L (244cm)

0.5" (12.7mm)	0.75" (19.05mm)	1.0" (25.4mm)	1.25" (31.75mm)	1.5" (38.1mm)	1.75" (44.45mm)
2.0" (50.8mm)					

Compression Sheets: 24"W x 48"L (61cm x 122cm)

0.25" (6.35mm)	0.375" (9.53mm)	0.5" (12.7mm)	0.75" (19.05mm)	1" (25.4mm)	1.25" (31.75mm)
1.50" (38.1mm)	1.75" (44.45mm)	2" (50.8mm)	2.25" (57.15mm)	2.50" (63.5mm)	2.75" (69.85mm)
3" (76.2mm)	3.25" (82.55mm)	3.50" (88.9mm)	3.75" (95.25mm)	4" (101.6mm)	

Compression Sheets: 48"W x 96"L (122cm x 244cm)

0.25" (6.35mm)	0.375" (9.53mm)	0.5" (12.7mm)	0.75" (19.05mm)	1" (25.4mm)	1.25" (31.75mm)
1.50" (38.1mm)	1.75" (44.45mm)	2" (50.8mm)	2.25" (57.15mm)	2.50" (63.5mm)	2.75" (69.85mm)
3" (76.2mm)	3.25" (82.55mm)	3.50" (88.9mm)	3.75" (95.25mm)	4" (101.6mm)	

Compression Sheets: 48"W x 120"L (122cm x 305cm)

0.25" (6.35mm)	0.375" (9.53mm)	0.5" (12.7mm)	0.75" (19.05mm)	1" (25.4mm)	1.25" (31.75mm)
1.50" (38.1mm)	1.75" (44.45mm)	2" (50.8mm)	2.25" (57.15mm)	2.50" (63.5mm)	2.75" (69.85mm)
3" (76.2mm)	3.25" (82.55mm)	3.50" (88.9mm)	3.75" (95.25mm)	4" (101.6mm)	



P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Propylux™ VF

Compression Sheets: 60"W x 120"L (152cm x 305cm)

0.25" (6.35mm)	0.375" (9.53mm)	0.5" (12.7mm)	0.75" (19.05mm)	1" (25.4mm)	1.25" (31.75mm)
1.50" (38.1mm)	1.75" (44.45mm)	2" (50.8mm)	2.25" (57.15mm)	2.50" (63.5mm)	2.75" (69.85mm)
3" (76.2mm)	3.25" (82.55mm)	3.50" (88.9mm)	3.75" (95.25mm)	4" (101.6mm)	

LAST REVISED: 01/05/2024

This information is offered solely for your consideration, examination and verification, and is to be construed neither as a warranty nor guarantee that the same results as those stated herein will be obtained by the use to which others may put the material. Each user of the material should make his own tests to determine the characteristics and suitability of the material for his own particular use and the use which will be made of the completed product. This publication is not to be taken as a license to operate under, or a recommendation to infringe any patents. The observance of all legal regulations and patents is the responsibility of the user. The buyer's exclusive remedy against the seller shall be for the repair or replacement of defective stock. No other remedy (including, but not limited to, incidental or consequential damages for lost profits, lost sales, injury to person or property, or other incidental or consequential loss) shall be available to the buyer.

EXCLUSION OF WARRANTIES: THERE ARE NO WARRANTIES AS TO THE MATERIAL DESCRIBED HEREIN, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE. ANY VALUES STATED IN SELLER'S LITERATURE ARE TYPICAL PROPERTIES ONLY.