




P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Thermalux® PSU

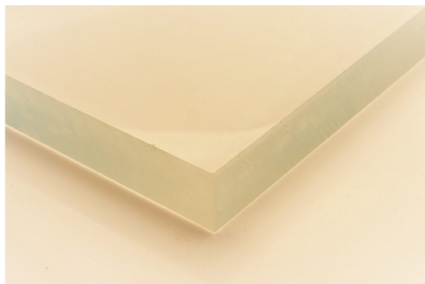

Thermalux® Polysulfone (PSU) is made from resin that is suitable for use in certain food contact applications, contact your local Westlake Plastics representative for specific regulatory declarations. Thermalux PSU is an amber colored, semi-transparent, heat-resistant, high performance engineering thermoplastic that offers higher heat resistance and better hydrolytic stability than polycarbonate (PC). It retains its good mechanical properties when exposed to steam and other sterilization techniques.

INDUSTRY



Chemical Process



Life Sciences

COLORS AVAILABLE



Natural

ATTRIBUTES

	Food Contact	✓
	Heat Resistant	✓
	Dimensional Stability	✓
	Dielectric Properties	✓
	Transparent	✓
	Biocompatibility	✓

SHAPES

Extruded Slab	✓
Compression Sheet	✓
Extruded Sheet	✓
Extruded Film	✓
Extruded Rod	✓



P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Thermalux® PSU

TYPICAL PROPERTIES

PROPERTY	TEST STANDARD	ENGLISH UNITS	METRIC UNITS
Mechanical			
Flexural Modulus	D790	390 kpsi	2690 MPa
Flexural Strength - 5%	D790	15 kpsi	106 MPa
Izod Impact Resistance - Notched	D256	1.29 ft-lb/in	69 J/m
Tensile Elongation @ Break	D638	50-100%	50-100%
Tensile Modulus	D638	359.7 kpsi	2480 MPa
Tensile Strength @ Break	D638	10.2 kpsi	70 MPa
Thermal			
HDT @ 264 psi	D648	345°F	174°C
Physical			
Moisture Absorption	D570	0.030%	0.030%
Specific Gravity	D792	1.24	1.24
Electrical			
Volume Resistivity	D257	1 x 10 ¹⁶ ohm-cm	1 x 10 ¹⁶ ohm-cm

*Data above is based on testing of injection molded test specimens



P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Thermalux® PSU

PRODUCT SHAPES & DIMENSIONS

Rods: 48"L (122cm)

2.25" (57.15mm)	2.5" (63.5mm)	2.75" (69.85mm)	3" (76.2mm)	3.25" (82.55mm)	3.5" (88.9mm)
3.75" (95.25mm)	4" (101.6mm)				

Rods: 96"L (244cm)

0.5" (12.7mm)	0.75" (19.05mm)	1" (25.4mm)	1.25" (31.75mm)	1.5" (38.1mm)	1.75" (44.45mm)
2" (50.8mm)					

Extruded Slabs: 24"W (61cm)

0.25" (6.35mm)	0.375" (9.53mm)	0.5" (12.7mm)	0.75" (19.05mm)	1" (25.4mm)	1.25" (31.75mm)
1.5" (38.1mm)	1.75" (44.45mm)				

Compression Sheets: 24"W x 48"L (61cm x 122cm)

0.375" (9.53mm)	0.5" (12.7mm)	0.75" (19.05mm)	1" (25.4mm)	1.25" (31.75mm)	1.5" (38.1mm)
1.75" (44.45mm)	2" (50.8mm)				

Compression Sheets: 48"W x 96"L (122cm x 244cm)

0.375" (9.53mm)	0.5" (12.7mm)	0.75" (19.05mm)	1" (25.4mm)	1.25" (31.75mm)	1.5" (38.1mm)
1.75" (44.45mm)	2" (50.8mm)				

Extruded Sheets: 48"W x 96"L (122cm x 244cm)

0.03" (0.76mm)	0.035" (0.89mm)	0.06" (1.52mm)	0.062" (1.57mm)	0.08" (2.03mm)	0.09" (2.29mm)
0.095" (2.41mm)	0.125" (3.18mm)	0.1875" (4.76mm)	0.25" (6.35mm)		



P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Thermalux® PSU

Extruded Films: 26"W (66cm)

0.002" (0.05mm)

0.003" (0.08mm)

0.004" (0.1mm)

0.005" (0.13mm)

0.010" (0.25mm)

0.020" (0.51mm)

LAST REVISED: 01/30/2025

This information is offered solely for your consideration, examination and verification, and is to be construed neither as a warranty nor guarantee that the same results as those stated herein will be obtained by the use to which others may put the material. Each user of the material should make his own tests to determine the characteristics and suitability of the material for his own particular use and the use which will be made of the completed product. This publication is not to be taken as a license to operate under, or a recommendation to infringe any patents. The observance of all legal regulations and patents is the responsibility of the user. The buyer's exclusive remedy against the seller shall be for the repair or replacement of defective stock. No other remedy (including, but not limited to, incidental or consequential damages for lost profits, lost sales, injury to person or property, or other incidental or consequential loss) shall be available to the buyer.

EXCLUSION OF WARRANTIES: THERE ARE NO WARRANTIES AS TO THE MATERIAL DESCRIBED HEREIN, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE. ANY VALUES STATED IN SELLER'S LITERATURE ARE TYPICAL PROPERTIES ONLY.