




P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Zelux® M

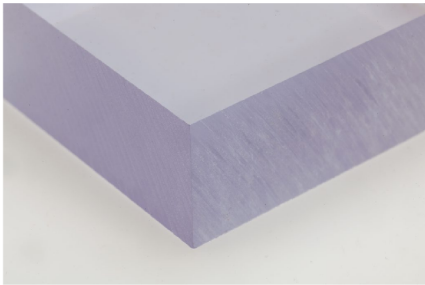

Zelux® M is a machine grade polycarbonate (PC). Zelux M is made from resin that is suitable for use in certain food contact applications, contact your local Westlake Plastics representative for specific regulatory declarations. This product is a transparent engineering thermoplastic with excellent dimensional stability, strength, and rigidity, along with service temperatures up to 250°F. This material has good insulating properties and is flame resistant. Zelux® M is also easy to fabricate, paint, and glue.


INDUSTRY



Aerospace & Defense



Engineering



Semiconductor and ESD

COLORS AVAILABLE




Black



Transparent

ATTRIBUTES

 Food Contact	✓
 Dielectric Properties	✓
 Impact Resistance	✓
 Dimensional Stability	✓
 Biocompatibility	✓

SHAPES

Compression Sheet	✓
Extruded Sheet	✓
Extruded Rod	✓



P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Zelux® M

TYPICAL PROPERTIES

PROPERTY	TEST STANDARD	ENGLISH UNITS	METRIC UNITS
Mechanical			
Flexural Modulus	D790	339 kpsi	2,340 MPa
Flexural Strength - Yield	D790	14 kpsi	97 MPa
Izod Impact Resistance - Notched	D256	16.99 ft-lb/in	907 J/m
Tensile Elongation @ Break	D638	135 %	135 %
Tensile Elongation @ Yield	D638	7 %	7 %
Tensile Modulus	D638	335 kpsi	2,310 MPa
Tensile Strength @ Break	D638	9.8 kpsi	68 MPa
Tensile Strength @ Yield	D638	8.9 kpsi	62 MPa
Thermal			
HDT @ 264 psi	D648	288°F	142°C
HDT @ 64 psi	D648	293°F	145°C
Physical			
Moisture Absorption	D570	0.15 %	0.15 %
Specific Gravity	D792	1.20	1.20
Electrical			
Volume Resistivity	D257	1 x 10 ¹⁷ ohm-cm	1 x 10 ¹⁷ ohm-cm
*Data above is based on testing of injection molded test specimens			
Other			
Flammability Rating**	UL 94 (file number E240206)	V-0 @ 0.37 inches (natural and black)	

**Results based on testing of machined test specimens



P: 1.800.999.1700 | F: 610.459.1084 | info@westlakeplastics.com | 490 West Lenni Road, Lenni, PA 19052 U.S.A.

Zelux® M

PRODUCT SHAPES & DIMENSIONS

Rods: 48"L (122cm)

2.25" (57.15mm)	2.50" (63.5mm)	2.75" (69.85mm)	3" (76.2mm)	3.25" (82.55mm)	3.50" (88.9mm)
3.75" (95.25mm)	4" (101.6mm)	4.25" (107.95mm)	4.50" (114.3mm)	4.75" (120.65mm)	5" (127mm)
5.25" (133.35mm)	5.50" (139.7mm)	5.75" (146.05mm)	6" (152.4mm)	6.25" (158.75mm)	6.50" (165.1mm)
6.75" (171.45mm)	7" (177.8mm)	8" (203.2mm)	9" (228.6mm)	10" (254mm)	11" (279.4mm)
12" (304.8mm)					

Rods: 96"L (244cm)

0.5" (12.7mm)	1" (25.4mm)	1.25" (31.75mm)	1.50" (38.1mm)	1.75" (44.45mm)	2" (50.8mm)
---------------	-------------	-----------------	----------------	-----------------	-------------

Compression Sheets: 48"W x 96"L (122cm x 244cm)

0.375" (9.53mm)	0.5" (12.7mm)	0.75" (19.05mm)	1" (25.4mm)	1.25" (31.75mm)	1.5" (38.1mm)
1.75" (44.45mm)	2" (50.8mm)	2.25" (57.15mm)	2.50" (63.5mm)	2.75" (69.85mm)	3" (76.2mm)
3.25" (82.55mm)	3.50" (88.9mm)	3.75" (95.25mm)	4" (101.6mm)		

Extruded Sheets: 48"W x 24"L (122cm x 61cm)

0.5" (12.7mm)	0.75" (19.05mm)	1.0" (25.4mm)	1.25" (31.75mm)	1.5" (38.1mm)	1.75" (44.45mm)
2.0" (50.8mm)	2.5" (63.5mm)	3.0" (76.2mm)			

LAST REVISED: 03/17/2025

This information is offered solely for your consideration, examination and verification, and is to be construed neither as a warranty nor guarantee that the same results as those stated herein will be obtained by the use to which others may put the material. Each user of the material should make his own tests to determine the characteristics and suitability of the material for his own particular use and the use which will be made of the completed product. This publication is not to be taken as a license to operate under, or a recommendation to infringe any patents. The observance of all legal regulations and patents is the responsibility of the user. The buyer's exclusive remedy against the seller shall be for the repair or replacement of defective stock. No other remedy (including, but not limited to, incidental or consequential damages for lost profits, lost sales, injury to person or property, or other incidental or consequential loss) shall be available to the buyer.

EXCLUSION OF WARRANTIES: THERE ARE NO WARRANTIES AS TO THE MATERIAL DESCRIBED HEREIN, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE. ANY VALUES STATED IN SELLER'S LITERATURE ARE TYPICAL PROPERTIES ONLY.